



**Trademark**  
SOUNDPROOFING

## Palette 2155 Acorn 1137

### Specifications

#### Contents

Polyester 100%

#### Weight

. oz./lin. yd 1 ± 12

#### Width

min. useable "54

#### Repeat

none

#### Treatment

none

#### Backing

none

### Cleaning Code


Standard Care Label W-S. Clean with water based cleaning>

, agents

foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with

hydrogen peroxide, alcohol, and quaternary ammonium (quat)

<.based cleaners

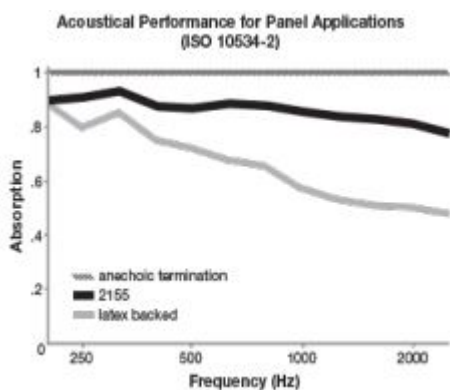

### Performance

(**Breaking Strength** (ASTM D5034  
lbf min. warp and 280 lbf min. fill 295

(**Tear** (ASTM D2261

lbf min. warp and 75 lbf min. fill 85

(**Seam Slippage** (ASTM D4034

lbf warp & 75 lbf fill 85

(**Pilling resistance** (ASTM D3511

. Class 4 min

(**Colorfastness to light** (AATCC 16.3

(Option 3

Grade 4 min. at 40 hours

(**Colorfastness to crocking** (AATCC 8

Grade 4 min. dry & Grade 3 min. wet

Wyzenbeek Abrasion resistance (ASTM

(D4157

double rubs min. cotton duck 100,000

### Flammability

CA Technical Bulletin 117-2013 Section 1

ASTM E84 Class I or A

### NRC of anechoic termination

1.00

NRC of fabric in front of anechoic

### termination

0.90

### Miscellaneous

Proudly woven in North America supporting our  
. local communities

Application testing of this product is

recommended. Colors may vary

.between dye lots

845-388-1200

sales@TMSoundproofing.com

www.TMSoundproofing.com