

Application:

TMS Silent Clip - A237R is an engineered, patented acoustic resilient mounting bracket for Studco furring channels, for reducing airborne vibration and structure-borne vibration in wall and ceiling applications.

Features:



- Engineered thermoplastic rubber outperforms standard rubber because of its sound absorbing characteristics
- Simple design makes it adaptable to hundreds of applications
- Consistent and reliable quality – manufactured under ISO9001 quality control system
- TMS Silent Clips are the most cost-effective way to isolate airborne noise
- Does not use metal washer or metal insert in rubber
- A237R clips can be used to suit 7/8" and 1 1/2" furring channels
- A237R clips are provided with a 1/4" hole for a variety of fasteners

Dynamic Characteristics:

TMS Silent Clips patented thermoplastic rubber outperforms standard rubber because of its unique natural absorbing characteristics. TMS Silent Clips unique sound cell design guards against structure borne vibrations transferring into the body of the clip because of its strong column design providing a small percentage of contact surface area with the structure or substrate it is fastened to. This aids in absorbing and breaking up airborne sound at its transfer point.

Installation Notes:

- A237R to be fastened to structure with a minimum #8 screw or masonry sleeve anchors. (See fasteners manufacturers specifications)
- Load capacity: 55 lbs. Maximum dead load.
- Maximum spacing of clips on furring channel is 48"
- Spacing between furring channels should not exceed 24"

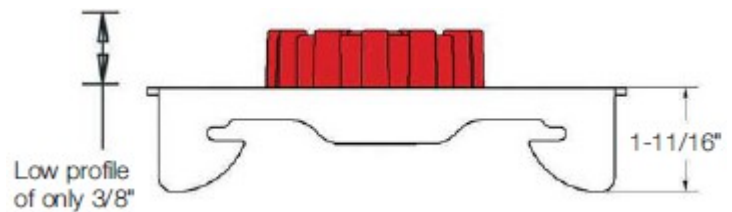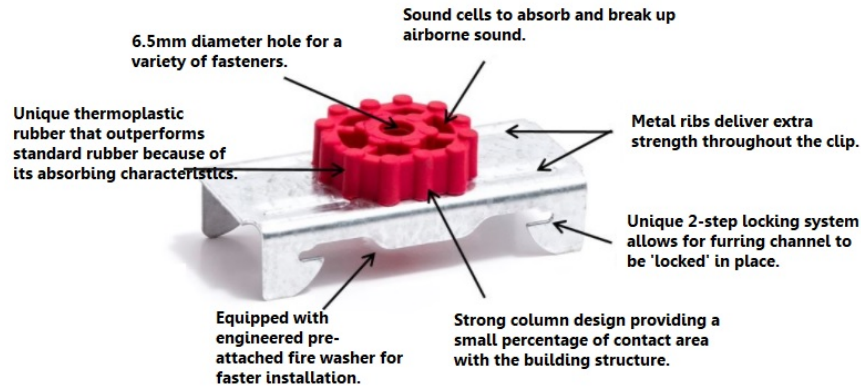

Specifications:

Code	Clip Height	Metal Thickness	Clip width x length	Height of rubber*
A237R	1 1/8"	0.047"	1 3/8" x 3 1/8"	3/8"

*Height of rubber on top of clip

Accreditation/Certification:



UL & Warnock Hersey Listed

