




MODEL FF109-200

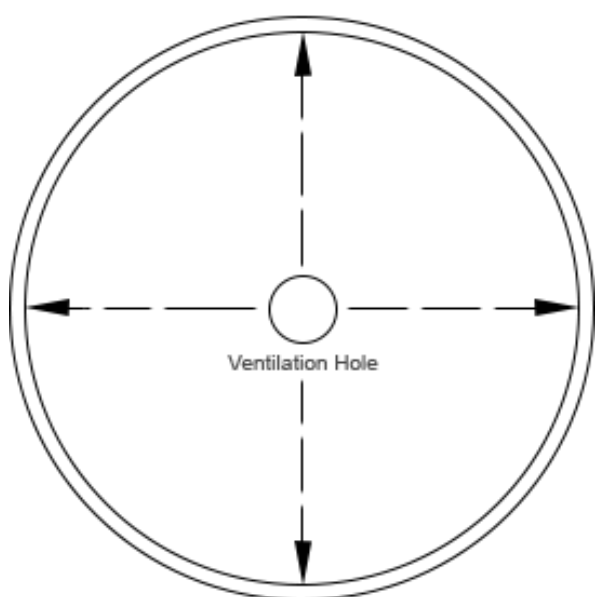

Model Number	Outside Height	Outside Diameter
FF109-200	8 1/4"	7 7/8"
Performance Data		
For Use: <ul style="list-style-type: none"> ETL-Intertek certified to maintain the fire rating (1 hour) of fire-rated floor/ceiling assemblies. Tested to ASTM E119 <ul style="list-style-type: none"> UBC 7 1 NFPA 251 ASI A2.1 		
		
General Information		
Benefits: <ul style="list-style-type: none"> Easy Installation - can be fitted in seconds - no screws, drilling or additional sealant required Can be folded and fitted from above or below the ceiling 60 minute protection Flexible material enables the cover to be fitted around obstacles or retro-fitted Enhances the acoustic protection of the ceiling Maintenance free Lightweight The only fire tested solution for retrofit applications Fits most 4" low profile LED downlight fixtures and LED wafer lights 		
Manufactured By		
Tenmat Inc 23 Copper Drive Newport, DE 19804 Phone: (302) 633-6600 Fax: (302) 633-6838 Email: info@tenmatusa.com		

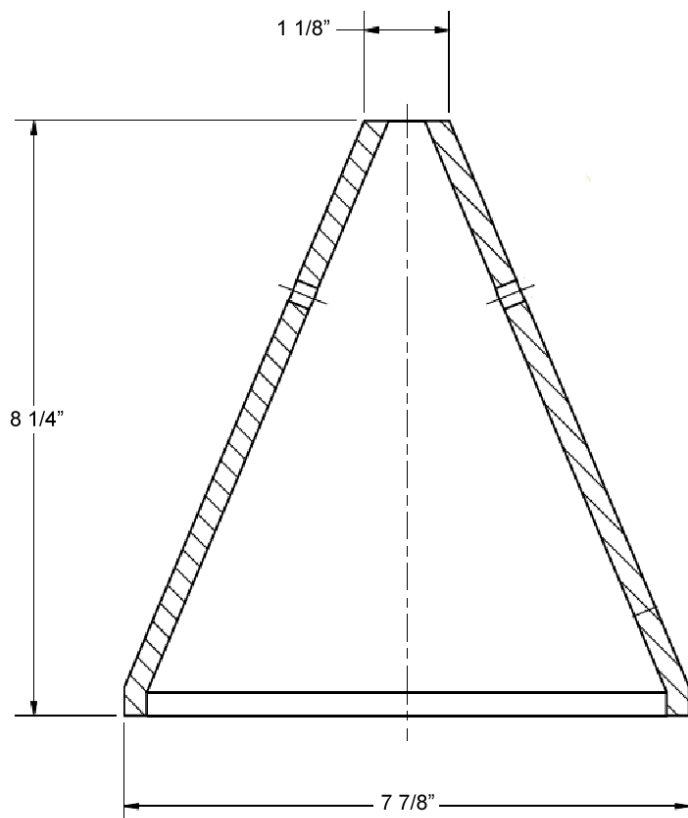