

## Felt 9900: Acoustic, Panel

Aegean 3051

### Specifications

**Content**

100% polyester

**Weight**

10.2 oz/lin.yard

**Width**

64" useable

**Repeat**

none

\* For more information, view our [Finishes brochure](#) or contact Sales Service: 800-544-0200



### Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

### Performance



**Breaking Strength (ASTM D5034)**

138 lbf min. warp and 96 lbf min. fill

**Colorfastness to light (AATCC 16.3 Option 3)**

Grade 4 min. at 40 hours

**Colorfastness to crocking (AATCC 8)**


Grade 4 min. dry & Grade 4 min. wet

**Flammability**

ASTM E84 Class I or A

## Felt 9900: Acoustic, Panel

Aegean 3051

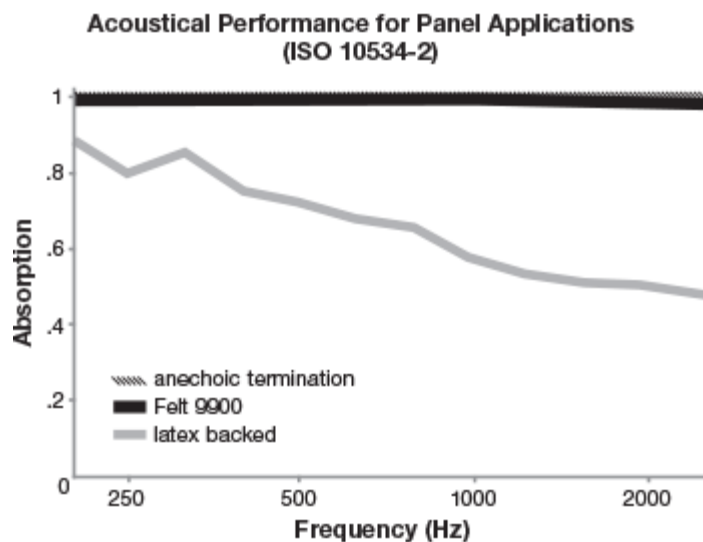

**NRC of anechoic termination**  
1.00

**NRC of fabric in front of anechoic termination**  
0.99

### Miscellaneous

Proudly made in North America supporting our local communities.

Application testing of this product is recommended. Colors may vary between dye lots. This is a non-directional fabric.

This product is a Feltvari™ non-woven.

[www.tmsoundproofing.com](http://www.tmsoundproofing.com)

Phone: 845-388-1200 Fax: 845-388-1388