



Trademark
SOUNDPROOFING

GUILFORD OF MAINE - ANCHORAGE

PRODUCT SPECS

Anchorage 2335

Angora 2035

Specifications:

Contents

35% post-consumer recycled polyester
65% pre-consumer recycled polyester

Weight

15.0 +/- 1.0 oz./ lin. yd.

Width

66" min. useable

Repeat

none

Treatment

None

Backing


None

Cleaning Code

Standard Care Label: Clean with water based cleaning agents, foam or pure water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.



**Acoustical Performance for Panel Applications
(ISO 10534-2)**

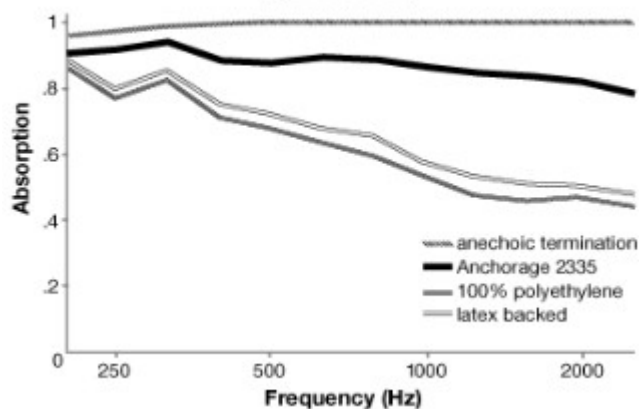

Performance:

Breaking Strength (ASTM D5034)

275 lbf min. warp and 275 lbf min. fill

Tear (ASTM D2261)

35 lbf min. warp and fill

Colorfastness to light (AATCC 16 Option 3)

Grade 4 min. at 40 hours

Colorfastness to crocking (AATCC B)

Grade 4 min. dry & Grade 3 min. wet

Flammability

ASTM E84 Class 1 or A

NRC of anechoic termination

1.00

NRC of fabric in front of anechoic termination

.85

Miscellaneous:

Also available in 54" width except color White.

This is a directional fabric.

Proudly woven in the USA supporting our local communities.

Application testing of this product is recommended.



Terralex is a registered trademark of True Textiles, Inc. and designates fabrics that are made from 100% recycled or compostable material using increasingly sustainable manufacturing practices to produce a high quality product that is recyclable at the end of its useful life.



CO₂ emissions from 100% of the electricity used by the manufacturer to produce this product have been measured and offset in accordance with the CarbonNeutral Protocol.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.

www.tmsoundproofing.com

Phone: 845-388-1200 Fax: 845-388-1388