



# GUILFORD OF MAINE - BROADCAST

## PRODUCT SPECS

### Broadcast 2758: Panel

Chickory 1205

#### Specifications:

##### **Contents**

100% Polyester

##### **Weight**

9.5 +/- 0.5 oz./lin. yd.

##### **Width**

66" min. useable

##### **Repeat**

None



#### Cleaning Code:

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

#### Performance:

##### **Breaking Strength (ASTM D5034)**

150 lbf min. warp and 100 lbf min. fill

##### **Tear (ASTM D2261)**

15 lbf min. warp and 10 lbf min. fill

##### **Colorfastness to light (AATCC 16 Option 3)**

Grade 4 min. at 40 hours

##### **Colorfastness to crocking (AATCC 8)**

Grade 4 min. dry & Grade 3 min wet

##### **Flammability**

ASTM E84 Class A or !

##### **NRC of anechoic termination**

1.00


##### **NRC of fabric in front of anechoic termination**

.95

#### Miscellaneous:

This is a directional fabric. Proudly woven in the USA supporting our local communities. Application testing of this product is recommended.

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

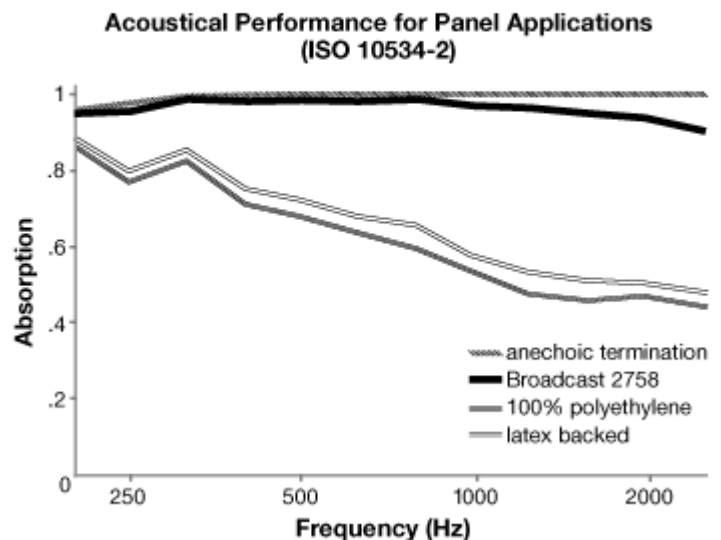

[www.tmsoundproofing.com](http://www.tmsoundproofing.com)

Phone: 845-388-1200 Fax: 845-388-1388