



**Trademark**  
SOUNDPROOFING

# GUILFORD OF MAINE – CAPE COD

## PRODUCT SPECS

### Cape Cod 3073: Panel

Apricot 7010

#### Specifications:

##### **Contents**

24% post-consumer recycled Polyester  
76% pre-consumer recycled Polyester

##### **Weight**

12.4 +/- 1.0 oz./lin. yd.

##### **Width**

66" min. useable

##### **Repeat**

None

##### **Treatment**

None

##### **Backing**

None

##### **Cleaning Code**

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

#### Performance:

##### **Breaking Strength** (ASTM D5034)

150 lbf min. warp and fill

##### **Tear** (ASTM D2261)

30 lbf min. warp and fill

##### **Colorfastness to light** (AATCC 16 Option 3)

Grade 4 min. at 40 hours

##### **Colorfastness to crocking** (AATCC 8)

Grade 4 min. dry & Grade 3 min wet

##### **Flammability**

ASTM E84 Class 1 or A

##### **NRC of anechoic termination**


1.00

##### **NRC of fabric in front of anechoic termination**


.95

#### Miscellaneous:

This is a directional fabric. Proudly woven in the US supporting our local communities. Application testing of this product is recommended.

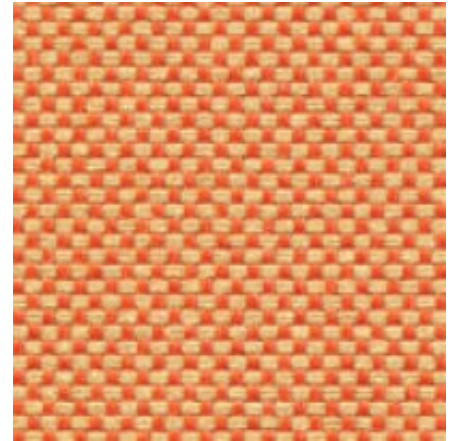

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

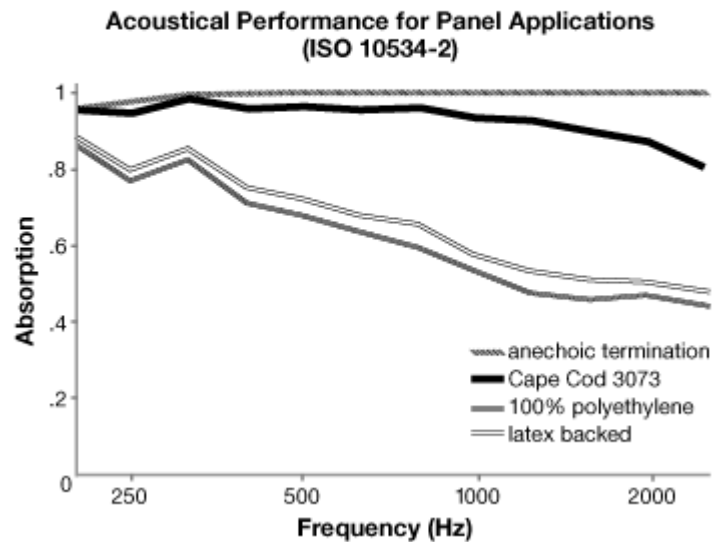

Terratek is a registered trademark of True Textiles, Inc. and designates fabrics that are made from 100% recycled or compostable material using increasingly sustainable manufacturing practices to produce a high quality product that is recyclable at the end of its useful life.



CO<sub>2</sub> emissions from 100% of the electricity used by the manufacturer to produce this product have been measured and offset in accordance with the CarbonNeutral Protocol.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.

[www.tmsoundproofing.com](http://www.tmsoundproofing.com)

Phone: 845-388-1200 Fax: 845-388-1388