GUILFORD OF MAINE - MEANDER

PRODUCT SPECS

Meander 2660: Panel

Spray 010

Specifications:

Contents
28% post-consumer recycled Polyester
72% pre-consumer recycled Polyester

Weight
11.6 +/- 0.5 oz./lin. yd.

Width
66" min. useable

Repeat
10.5" vertical, 16.2" horizontal

Treatment
None

Backing
None

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

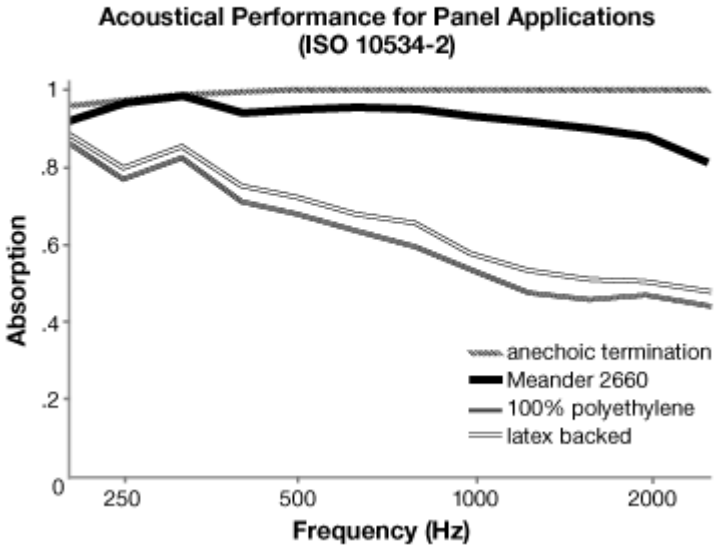

Cleaning Code:

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Performance:

Breaking Strength (ASTM D5034)
225 lbf min. warp and 100 lbf min. fill

Tear (ASTM D2261)
25 lbf min. wapr and 15 lbf min. fill

Colorfastness to light (AATCC 16 Option 3)
Grade 4 min. at 40 hours

Colorfastness to crocking (AATCC 8)
Grade 4 min. dry & Grade 3 min. wet

Flammability
ASTM E84 Class 1 or A

NRC of anechoic termination
1.00

NRC of fabric in front of anechoic termination
.95

Terratex is a registered trademark of True Textiles, Inc. and designates fabrics that are made from 100% recycled or compostable material using increasingly sustainable manufacturing practices to produce a high quality product that is recyclable at the end of its useful life.

CO_2 emissions from 100% of the electricity used by the manufacturer to produce this product have been measured and offset in accordance with the CarbonNeutral Protocol.

This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.

Miscellaneous:

This is a directional fabric. Proudly woven in the USA supporting or local communities. Application testing of this product is recommended.

www.tmsoundproofing.com

Phone: 845-388-1200 Fax: 845-388-1388