



Trademark
SOUNDPROOFING

GUILFORD OF MAINE - STUDIO 54

PRODUCT SPECS

Studio 54 2966: Panel

Disco 7030

Specifications:

Contents

100% Polypropylene

Weight

12.8 +/- 1.0 oz./lin. yd.

Width

66" min. useable

Repeat

.1" vertical, none horizontal

Treatment

Polyester Binder

Backing

None

Cleaning Code:

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

May be cleaned with a 4:1 water-to-bleach solution. Rinse well after cleaning.

Performance:

Breaking Strength (ASTM D5034)

100 lbf min. warp and 250 lbf min. fill

Tear (ASTM D2261)

25 lbf min. warp and 55 lbf min. fill

Colorfastness to light (AATCC 16 Option 3)

Grade 4 min. at 40 hours

Colorfastness to crocking (AATCC 8)

Grade 4 min. dry & Grade 3 min. wet

Flammability

ASTM E84 Class 1 or A

NRC of anechoic termination


1.00

NRC of fabric in front of anechoic termination


.95

Miscellaneous:

This is a directional fabric. Variation in texture and luster, due to the manufacturing process, is to be expected and is part of the inherent beauty of studio 54. Proudly woven in the USA supporting our local communities. Application testing of this product is recommended.

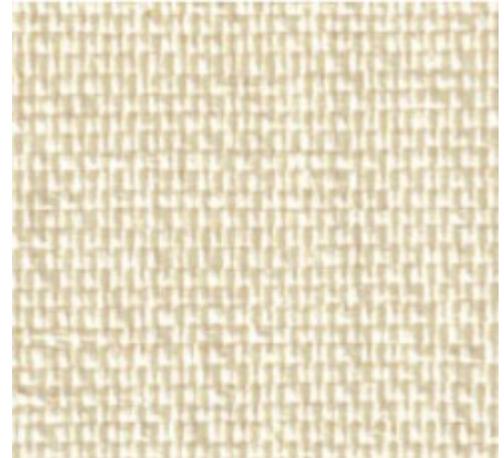

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

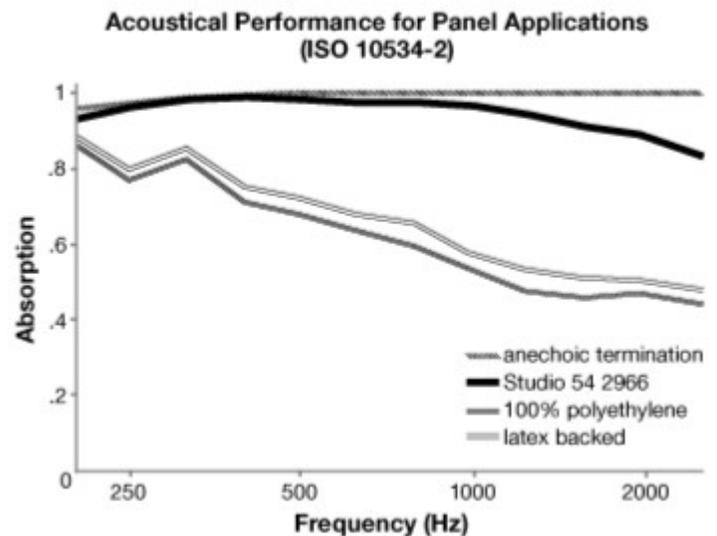

www.tmsoundproofing.com

Phone: 845-388-1200 Fax: 845-388-1388