



## Off the Grid 1233: Acoustic, Panel Coal 1302

### Specifications:

#### **Content**

49% pre -consumer recycled Polyester  
38% post-consumer recycled Polyester  
13% Polyester

#### **Weight**

10.0 +/- 1.0 oz./line. yd.

#### **Width**

66" min. useable

#### **Repeat**

None

#### **Backing**

None

#### **Treatment**

Polyester Binder

For more information, view our Finishes brochure

### Cleaning Code:

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

### Performance:

#### **Breaking Strength (ASTM D5034)**

185 lbf min. warp and 165 lbf min. fill

#### **Colorfastness to light (AATCC 16.3 Option 3)**

Grade 4 min. at 40 hours

#### **Colorfastness to crocking (AATCC 8)**

Grade 4 min. dry & Grade 3 min. wet

#### **Flammability**


ASTM E84 Class 1 or A

#### **NRC of anechoic termination**


1.00

#### **NRC of fabric in front of anechoic termination**

1.00

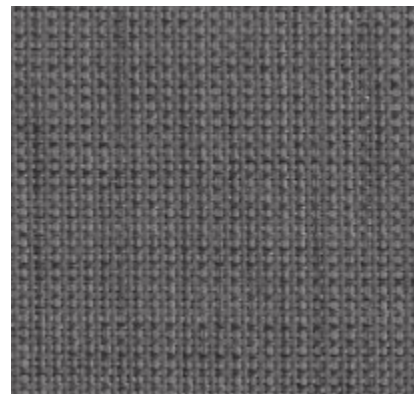

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

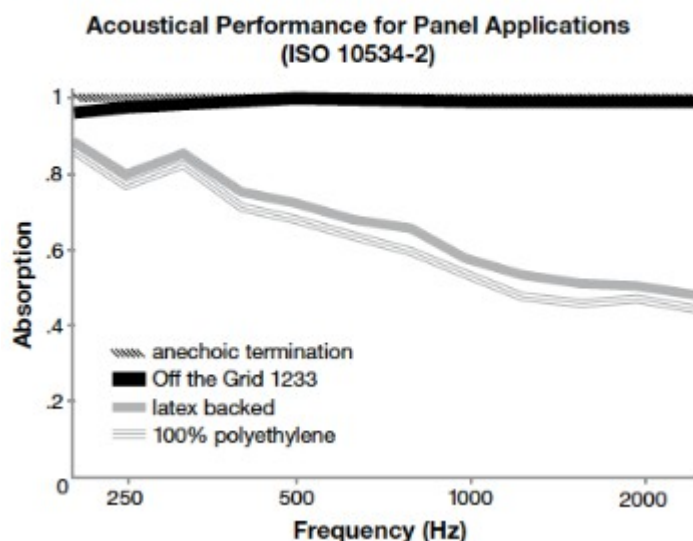

### Miscellaneous:

Proudly woven in North America supporting our local communities. Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.

[www.tmsoundproofing.com](http://www.tmsoundproofing.com)

Phone: 845-388-1200 Fax: 845-388-1388