



PRODUCT SPECS

Netiquette 1241: Acoustic, Panel Analog 1294

Specifications:

Content

68% Polyester

32% post-consumer recycled Polyester

Weight

9.6 +/- 1.0 oz./lin yd.

Width

66" min useable

Repeat

7.25" vertical 14" horizontal

Backing

None

Treatment

Polyester Binder

For more information, view our Finishes brochure.

Cleaning Code:

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Performance:

Breaking Strength (ASTM D5034)

250 lbf min. warp and 130 lbf min. fill

Colorfastness to light (AATCC 16.3 Option 3)

Grade 4 min. at 40 hours

Colorfastness to crocking (AATCC 8)


Grade 4 min. dry & Grade 3 min. wet

NRC of anechoic termination


1.00

NRC of fabric in front of anechoic termination

.95

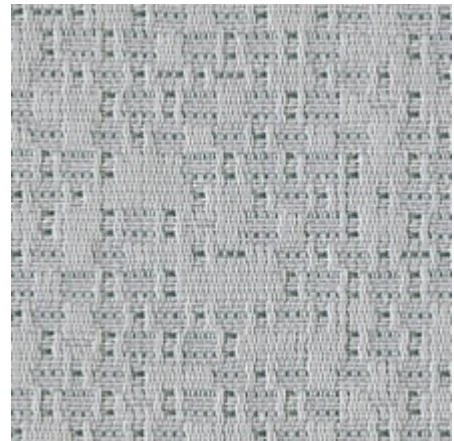

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

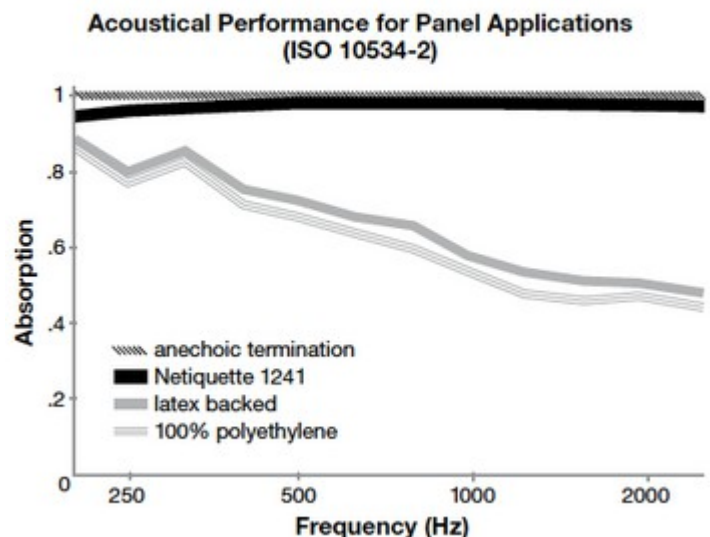

www.tmsoundproofing.com

Phone: 845-388-1200 Fax: 845-388-1388