




**Trademark**  
SOUNDPROOFING

## RSIC-V Value Clip

### Product Data Sheet

#### About RSIC-V Value Clip




The RSIC-V Value Clip is designed for use with framed application where noise control is required. The Clip is applied with a Drywall Furring / Hat Channel assembly which decouples the gypsum board from the structure, thereby creating a floating structure and giving the assembly enhanced acoustical performance.

The RSIC-V clip fastens directly to the framing or structure and is compatible with wood framed, steel framed, CMU, or concrete wall and or ceiling systems.

#### Product Specifications

RSIC-V specifications:	
Acoustical design load:	36 Lbs
Total deflection	N/A
Double deflection	N/A
Adjustable	No
Cavity min	1-1/8"
Cavity Max	1-1/8"
Adjustment limit	N/A
Tumble Deburring	Yes
Use on Ceilings	Yes
Use on walls	Yes
New Construction	Yes
Retro Fit	Yes
Made in USA	Yes

#### Sample Applications

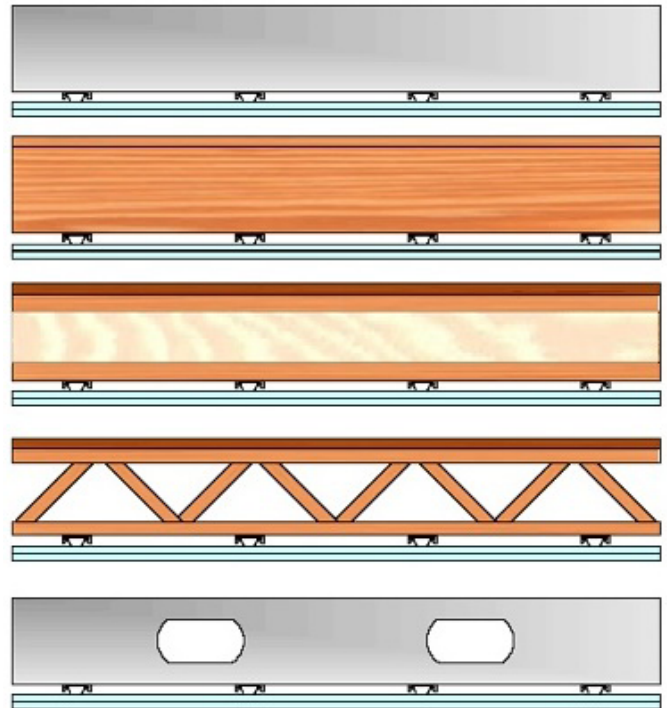

#### Compliance Details



The RSIC-V Value Clip is the first clip of its kind that rated UL Classified for both Fire and Sound!




**Trademark**  
SOUNDPROOFING

## RSIC-V Value Clip


### Product Data Sheet

#### Product Specs


Profile View:

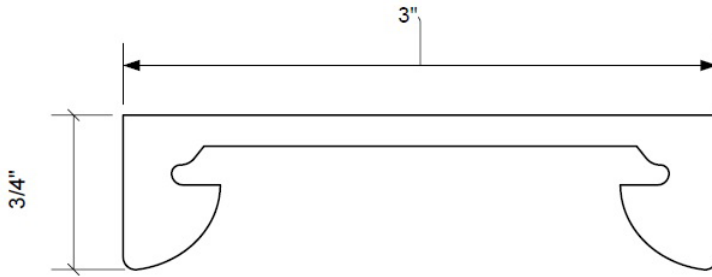

End View:

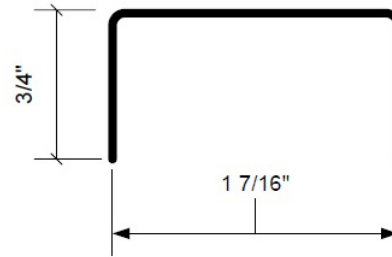

Profile View with Hat Channel:

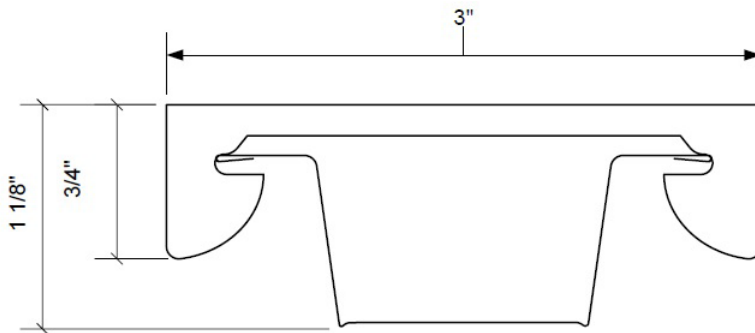

Compatible Hat Channel:

