




Trademark
SOUNDPROOFING

RSIC-V Value Clip

UL Fire Rated Designs

UL Fire Resistive Design - 1 HOUR - V477 Steel Wall System Details with Value Clip


ONE HOUR - STC 58

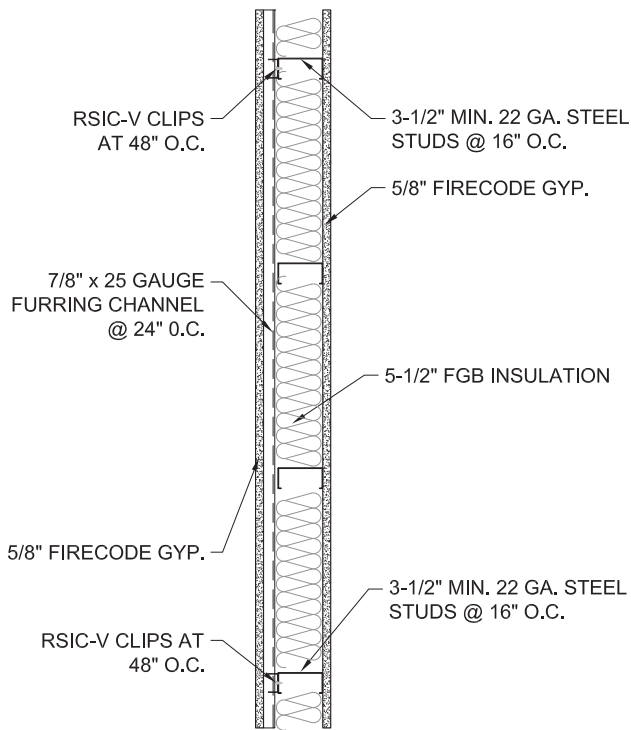

ONE HOUR CONSTRUCTION


- 5/8" FIRECODE GYP.
- 7/8" x 25 GAUGE FURRING CHANNEL @ 24" O.C.
- RSIC-V CLIPS @ 24" x 48" oc
- 3-1/2" MIN. 22 GA. STEEL STUDS @ 16" oc
- 5-1/2" FGB INSULATION
- 5/8" FIRECODE GYP.

ONE HOUR STC 58

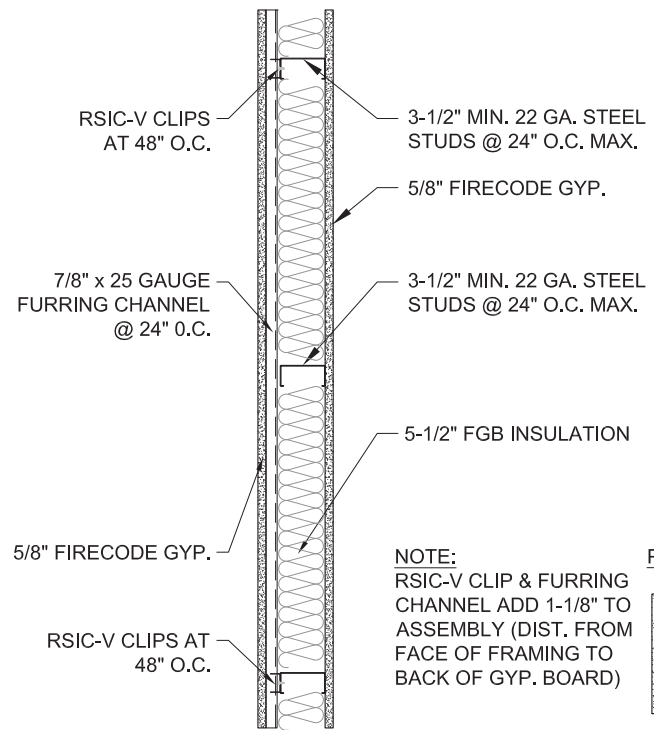

NOTE:
RSIC-V CLIP & FURRING
CHANNEL ADD 1-1/8" TO
ASSEMBLY (DIST. FROM
FACE OF FRAMING TO
BACK OF GYP. BOARD)

PROFILE



ONE HOUR CONSTRUCTION

- 5/8" FIRECODE GYP.
- 7/8" x 25 GAUGE FURRING CHANNEL @ 24" O.C.
- RSIC-V CLIPS @ 24" x 48" oc
- 3-1/2" MIN. 22 GA. STEEL STUDS @ 24" oc MAX.
- 5-1/2" FGB INSULATION
- 5/8" FIRECODE GYP.




Trademark
SOUNDPROOFING

RSIC-V Value Clip

UL Fire Rated Designs

UL Fire Resistive Design - 2 HOUR - V477 Steel Wall System Details with Value Clip


TWO HOUR - STC 64

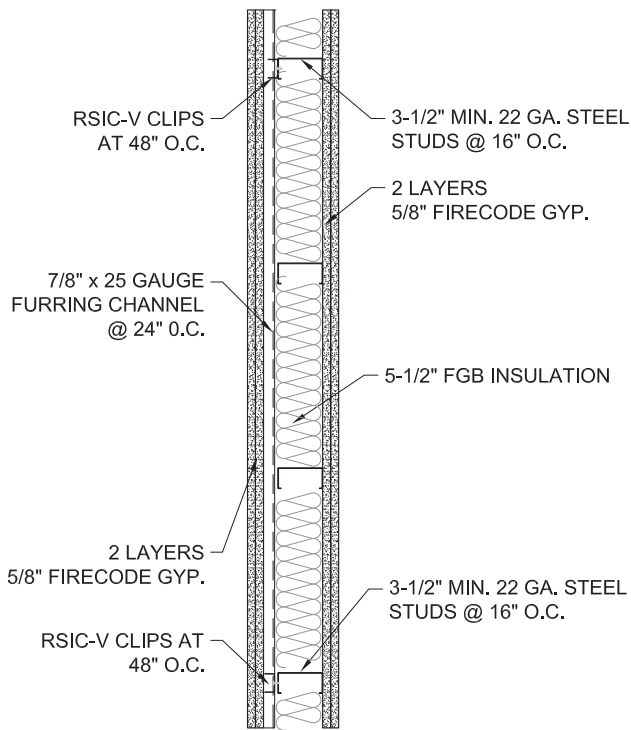

TWO HOUR CONSTRUCTION


- 5/8" FIRECODE GYP.
- 7/8" x 25 GAUGE FURRING CHANNEL @ 24" O.C.
- RSIC-V CLIPS @ 24" x 48" oc
- 3-1/2" MIN. 22 GA. STEEL STUDS @ 16" oc
- 5-1/2" FGB INSULATION
- 5/8" FIRECODE GYP.

TWO HOUR STC 64

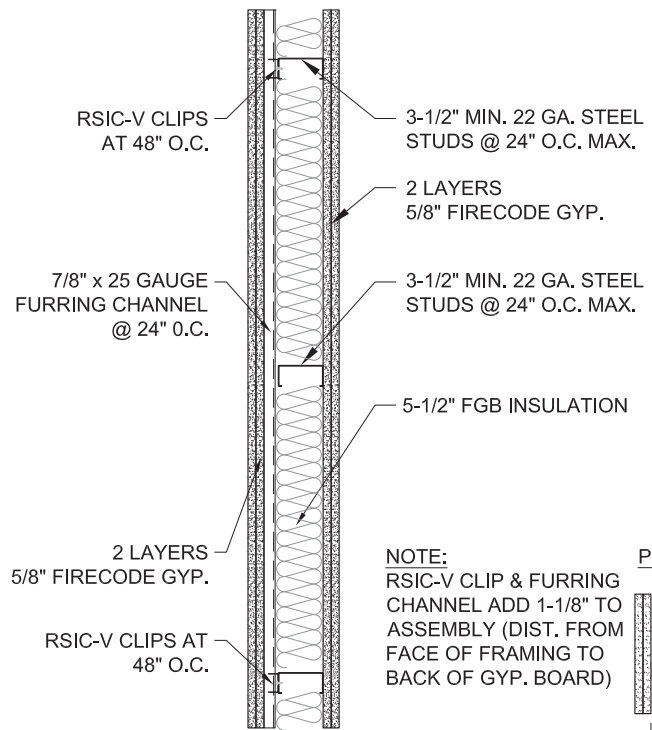

NOTE:
RSIC-V CLIP & FURRING CHANNEL ADD 1-1/8" TO ASSEMBLY (DIST. FROM FACE OF FRAMING TO BACK OF GYP. BOARD)

PROFILE



TWO HOUR CONSTRUCTION

- 5/8" FIRECODE GYP.
- 7/8" x 25 GAUGE FURRING CHANNEL @ 24" O.C.
- RSIC-V CLIPS @ 24" x 48" oc
- 3-1/2" MIN. 22 GA. STEEL STUDS @ 24" oc MAX.
- 5-1/2" FGB INSULATION
- 5/8" FIRECODE GYP.




Trademark
SOUNDPROOFING

RSIC-V Value Clip

UL Fire Rated Designs

UL Fire Resistive Design - 1 HOUR - V489 Steel Wall System Details with Value Clip


ONE HOUR - STC 58

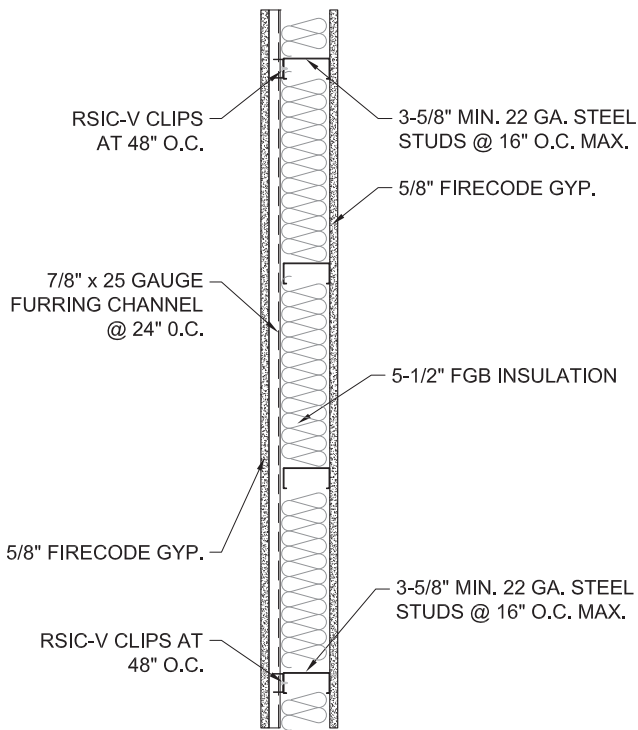

ONE HOUR CONSTRUCTION

- 5/8" FIRECODE GYP.
- 7/8" x 25 GAUGE FURRING CHANNEL @ 24" O.C.
- RSIC-V CLIPS @ 24" x 48" oc
- 3-5/8" MIN. 22 GA. STEEL STUDS @ 16" oc MAX.
- 5-1/2" FGB INSULATION
- 5/8" FIRECODE GYP.

ONE HOUR - STC 58

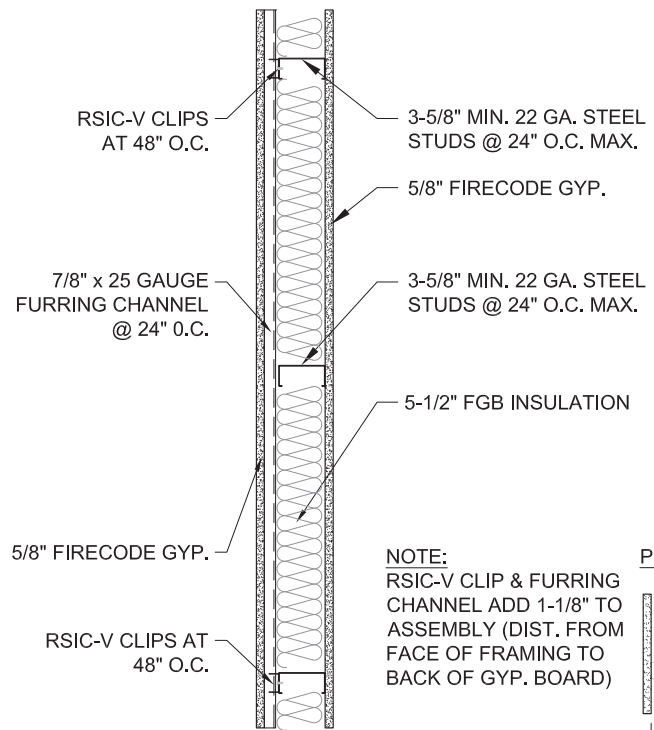


ONE HOUR CONSTRUCTION

- 5/8" FIRECODE GYP.
- 7/8" x 25 GAUGE FURRING CHANNEL @ 24" O.C.
- RSIC-V CLIPS @ 24" x 48" oc
- 3-5/8" MIN. 22 GA. STEEL STUDS @ 24" oc MAX.
- 5-1/2" FGB INSULATION
- 5/8" FIRECODE GYP.

NOTE:
RSIC-V CLIP & FURRING
CHANNEL ADD 1-1/8" TO
ASSEMBLY (DIST. FROM
FACE OF FRAMING TO
BACK OF GYP. BOARD)

PROFILE






Trademark
SOUNDPROOFING

RSIC-V Value Clip

UL Fire Rated Designs

UL Fire Resistive Design - 2 HOUR - V489 Steel Wall System Details with Value Clip


TWO HOUR - STC 64

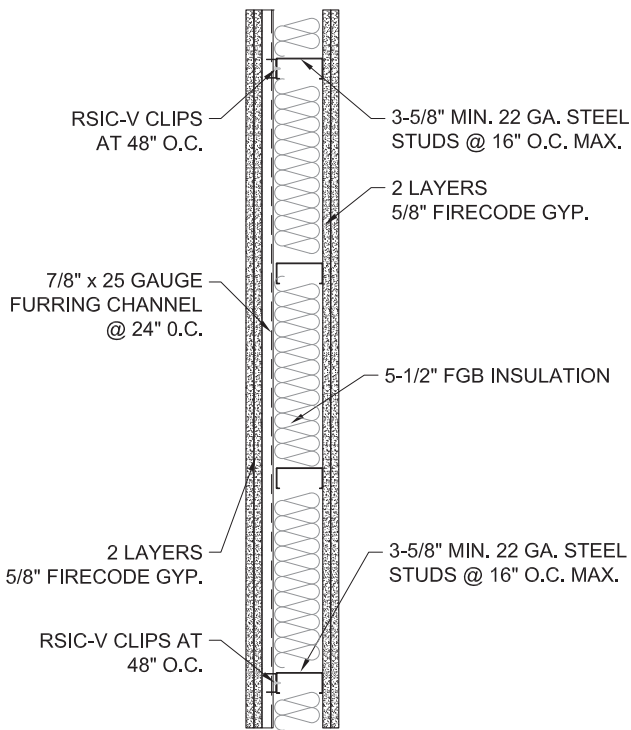

TWO HOUR CONSTRUCTION

- 2 LAYERS 5/8" FIRECODE GYP.
- 7/8" x 25 GAUGE FURRING CHANNEL @ 24" O.C.
- RSIC-V CLIPS @ 24" x 48" oc
- 3-5/8" MIN. 22 GA. STEEL STUDS @ 16" oc MAX.
- 5-1/2" FGB INSULATION
- 2 LAYERS 5/8" FIRECODE GYP.

TWO HOUR - STC 64

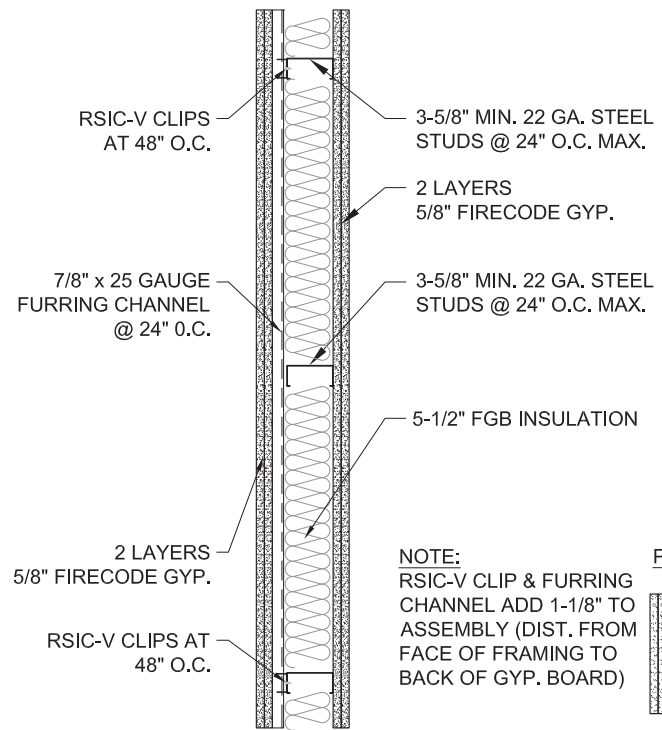

TWO HOUR CONSTRUCTION

- 2 LAYERS 5/8" FIRECODE GYP.
- 7/8" x 25 GAUGE FURRING CHANNEL @ 24" O.C.
- RSIC-V CLIPS @ 24" x 48" oc
- 3-5/8" MIN. 22 GA. STEEL STUDS @ 24" oc MAX.
- 5-1/2" FGB INSULATION
- 2 LAYERS 5/8" FIRECODE GYP.

NOTE:
RSIC-V CLIP & FURRING
CHANNEL ADD 1-1/8" TO
ASSEMBLY (DIST. FROM
FACE OF FRAMING TO
BACK OF GYP. BOARD)

PROFILE

