


## **RSIC Security Straps**

Installation Guide

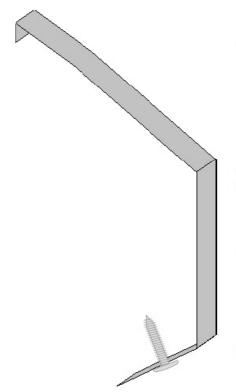

## RSIC Security Strap for Walls and Ceilings

- 2 RSIC-Security Straps per RSIC-1 Connection
- Increase static and dynamic load safety margin over two thousand (2,000) percent

## Fasteners:

- 1. Snap the RSIC-Security strap to the RSIC-1 clip
- 2. Secure the RSIC-1 Security strap to the drywall furring channel on the opposite side from the hooked end using standard point framing screws 7/16" or 1/2" in length. (fasteners supplied by others)
- 3. Repeat steps 1 and 2 from the bottom of the RSIC-1 clip.

Phone: 845.388.1200

Fax: 845.367.4657