




**Trademark**  
SOUNDPROOFING

www.tmsoundproofing.com



# TENMAT – FF130 TROFFER COVER

## PRODUCT SPECS

### MODEL FF130-2x2

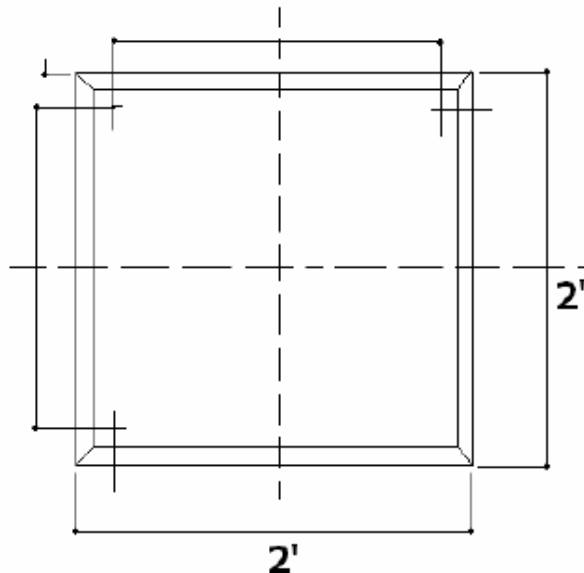

### MODEL FF130-2x4

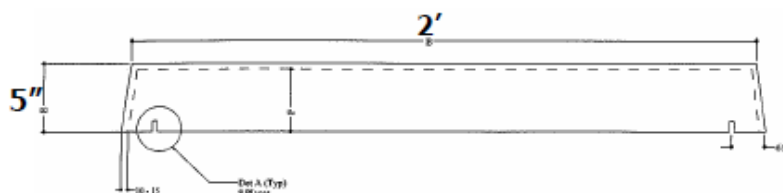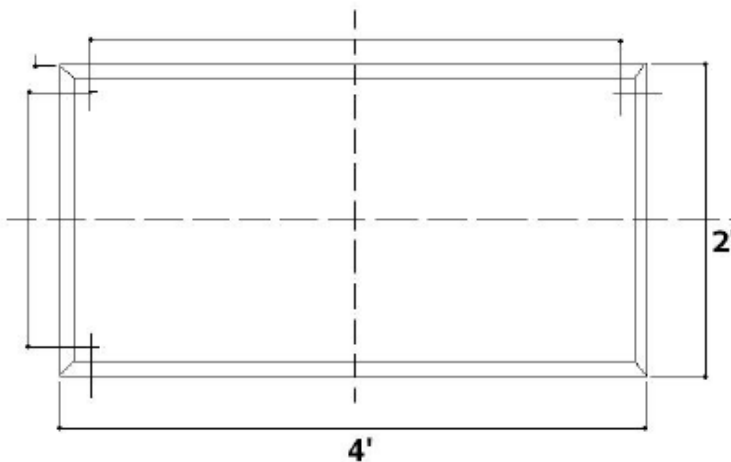

Model Number	Inside Height	Outside Width	Outside Length
FF130-2x2	5"	27"	29"
FF130-2x4	5"	28"	52"

#### Performance Data

##### For Use:

- UL Classified to maintain the fire rating (1 hour) for the following fire-rated assemblies: A202, D203, D216, D219, G205, G208, G218, G252, G255, G256, G262, G264, J201, J202, L006, L201, L202, L206, L209, L210, P202, P204, P206, P207, P210, P211, P213, P214, P216, P225, P227, P228, P229, P230, P231, P235, P238, P242, P246, P250, P251, P254, P255, P259, P260, P261, P264, P265, P267, P268, P269



CLASSIFIED FOR FIRE RESISTANCE  
FIRE RESISTANCE CLASSIFICATION  
SEE UL FIRE RESISTANCE DIRECTORY

#### General Information

##### Benefits:

- 60 minute protection.
- Fits most popular fluorescent fixtures.
- Suitable for lay-in tile ceilings.
- Lightweight (approx. 5 and 10 lbs).
- Easy Installation - can be fitted in seconds - no screws, drilling or additional sealant required.
- Enhances the acoustic protection of the ceiling.
- Reduces heat loss through the fixture.
- Maintenance free.
- Cable entry points can be made anywhere on the top and sides for ease of wiring of the fixture.

#### Manufactured By

##### Tenmat Inc

23 Copper Drive

Newport, DE 19804

Phone: (302) 633-6600

Fax: (302) 633-6838

Email: [info@tenmatusa.com](mailto:info@tenmatusa.com)

[www.tenmatusa.com](http://www.tenmatusa.com)