Trademark SOUNDPROOFING

S-2000 Fabric Acoustic Wall Panel
Product Data

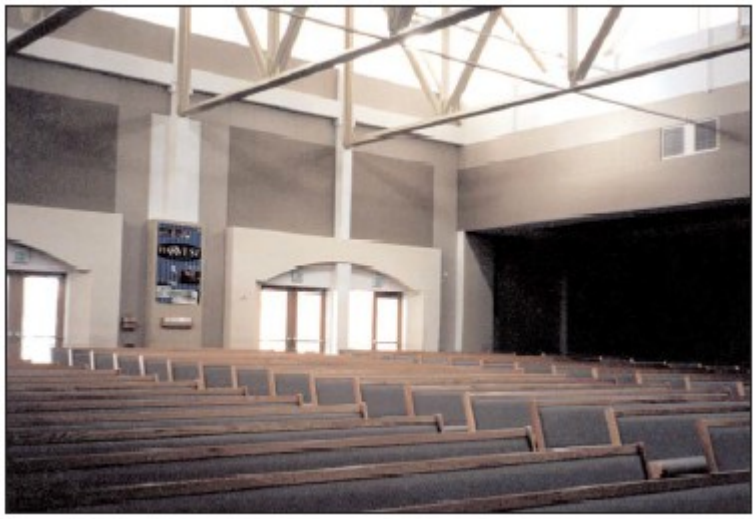

•High-quality, economical multi-purpose panels

• Excellent acoustical performance

• Class A fire-rated

• Standard, designer or custom finishes

Fabric Acoustic Wall Panels are the solution for areas that require noise reduction and are available in a variety of models for various applications. The S-2000 Wall Panel is manufactured to the highest standards and is specifically designed as a standard absorber panel that offers an economical way toresolve reverberant noise problems. Applications of the S-2000 panels include schools, universities, offices, airports, churches, restaurants and any area where excess reverberation is a problem.

The S-2000 Standard Wall Panel provides the ultimate in performance with excellent NRC ratings. Available in four standard thicknesses: 1/2”, 1”, 1 1/2”, and 2” with custom thicknesses available. S-2000 Panels are constructed with a 6-7# PCF rigid fiberglass absorber core. The edges are chemically hardened and are available in 4 edge profiles. S-2000 panels are available in standard or custom sizes (up to a maximum of 5'X10') with custom, designer or C.O.M. Fabric available.

Installation of the S-2000 panels is simplistic using mechanical clips, adhesive or hook & loop. Consult with factory on the best-suited mounting for your specific application.

148 Horton Drive, Suite B
Monsey, New York, 10952

Phone: 845.352.3200
Fax: 845.367.4657

www.TMSoundproofing.com

Trademark SOUNDPROOFING

S-2000 Fabric Acoustic Wall Panel
Product Data

Finishes:

Guilford of Maine FR701 Style 2100 is standard. Hundreds of approved decorator fabrics are also available from numerous manufactures including, but not limited to: Guilford of Maine, Deepa textiles, Design Tex, Wolf Gordon, Momentum and Knoll. Customers may also specify their own fabric, provided the material meets manufacturing requirements.

Acoustical

NRC Rating:

1/2”.....	.50-.60
1”	.80-.90
1 1/2”	.90-1.00
2”	1.05-1.15

Fire Rating

All components shall have a Class A fire rating per ASTM E-84.

Mounting Options

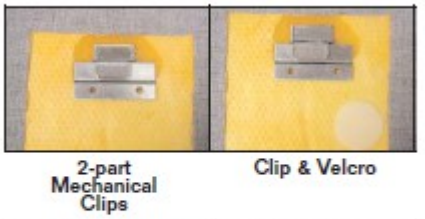

2-part Mechanical Clips | Clip & Velcro

Adhesive | Impaling Clip

Edge Detail

Square | Mitre | Bevel | Radius

148 Horton Drive, Suite B
Monsey, New York, 10952

Phone: 845.352.3200
Fax: 845.367.4657

www.TMSoundproofing.com