



**Trademark**  
SOUNDPROOFING

# Green Glue Tube

Installation Guide

## Installing Green Glue is FAST!

No measuring or troweling.

Use a standard (32oz) quart size caulk gun to apply.

Green Glue dispenses with very little effort.

Green Glue will not flow off the board during installation.

Application time is about 20-30 seconds per tube.

It is not necessary to have complete coverage to obtain excellent results.

### **Step 1:**

Hang the first layer of drywall - After hanging the first layer of drywall, it is recommended that you seal the seams between sheets. This can be done with either acoustical sealant or drywall mud. If using acoustical sealant, take care not to use a bead so large that it protrudes outside the plane of the drywall, preventing the second layer from sitting flat. If speed is an issue, you can omit this step and seal the perimeter after the last sheet of drywall is installed.

### **Step 2:**

Cut the end of the tube as shown in top left image. Screw on separate nozzle and cut end leaving an opening of 3/8" or more.

### **Step 3:**

Apply Green Glue to the second sheet of drywall on a clean, flat surface. Placing the drywall on saw horses will help prevent the board from getting damaged or dirty from laying it on the floor. Apply the glue in large beads in a random pattern across the entire board. Leave a 2-3" border with no Green Glue around the edge of the board. This will allow for better handling of the board. Use 1 or 2 tubes per 4'x8' sheet. 1 tube gives about 70% of the benefit of 2 tubes.

### **Step 4:**

After applying Green Glue to the back of the second layer, raise the board into position, press the board against the wall or ceiling, and fasten in place using appropriate screws. The Green Glue will squeeze into a thin layer (about 0.5 mm). The second layer must be hung and screwed within 15 minutes to prevent Green Glue from drying before it is in place. Typical screw spacing is 16" oc for walls and 12" oc for ceilings, but be sure to follow all appropriate local building codes regarding screw type and spacing. Use our Green Glue Noiseproofing Sealant to seal cracks and seams paying special attention to the crack where the drywall meets the floor as this doesn't get taped and mudded.




Step 2



Step 3



Step 3

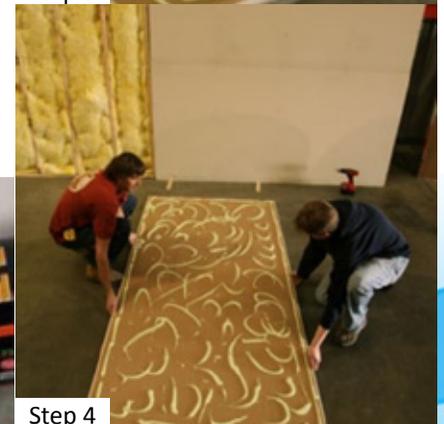

Step 4



Step 4



Step 4

DISCLAIMER: Because of the many installation variables beyond our control, Trademark Soundproofing shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than the intended use. Our liability is expressly limited to replacement of defective goods. Any claims shall be deemed as waived unless made in writing to Trademark Soundproofing within thirty (30) days from the date it was discovered, or reasonably should have been discovered.

Phone: 845-388-1200 | [sales@tmsoundproofing.com](mailto:sales@tmsoundproofing.com)

[www.TMSoundproofing.com](http://www.TMSoundproofing.com)