



**Trademark**  
SOUNDPROOFING

# GUILFORD OF MAINE - METRO

## PRODUCT SPECS

### Metro 3077: Panel

Goldust 010

#### Specifications:

#### Contents

11% post-consumer recycled Polyester  
89% pre-consumer recycled Polyester

#### Weight

10.7 +/- 1.0 oz./lin. yd.

#### Width

6" min. useable

#### Repeat

85.7" vertical, 14.12" horizontal

#### Treatment

None

#### Backing

None

#### Cleaning Code:

Standard Care Label W-S. Clean with water based cleaning agents, f pure, water free solvents. Vacuuming or light brushing is recommend prevent dust or soil buildup.

#### Performance:

#### Breaking Strength (ASTM D5034)

250 lbf min. warp and 150 lbf min. fill

#### Tear (D2261)

30 lbf min. warp and fill

#### Colorfastness to light (AATCC 16 Option 3)

Grade 4 min. at 40 hours

#### Colorfastness to crocking (AATCC 8)

Grade 4 min. dry & Grade 3 min. wet

#### Flammability

ASTM E84 Class 1 or A

#### NRC of anechoic termination

1.00

#### NRC of fabric in front of anechoic termination


.95

#### Miscellaneous:

This is a directional fabric. Proudly woven in the USA supporting our local communities. Application testing of this product is recommended.



The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

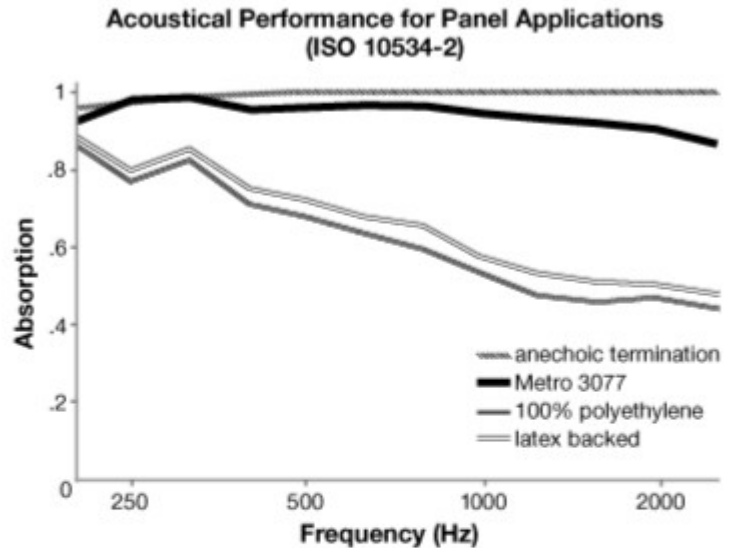

Terratex is a registered trademark of True Textiles, Inc. and designates fabrics that are made from 100% recycled or composable material using increasingly sustainable manufacturing practices to produce a high quality product that is recyclable at the end of its useful life.



CO<sub>2</sub> emissions from 100% of the electricity used by the manufacturer to produce this product have been measured and offset in accordance with the CarbonNeutral Protocol.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.

[www.tmsoundproofing.com](http://www.tmsoundproofing.com)

Phone: 845-388-1200 Fax: 845-388-1388