GUILFORD OF MAINE - INTERMIX

PRODUCT SPECS

Intermix 3035: Panel
Butter Rum 7050

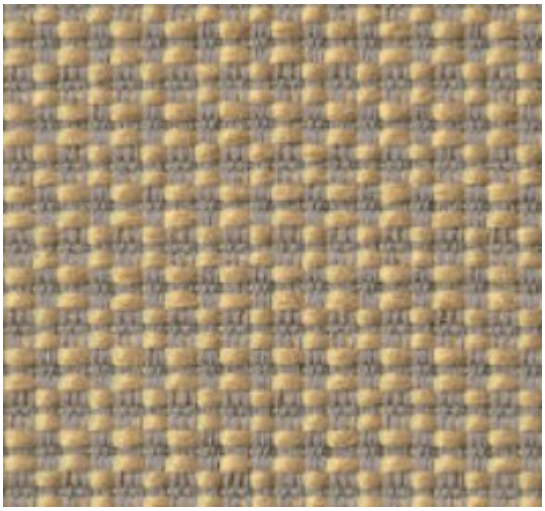

Specifications:
Content
100% pre-consumer recycled polyester

Weight
15.3 +/- 1.0 oz./lin. yd.

Width
66” min. useable

Repeat
None

Backing
None

Treatment
Polyester Binder

Terratex is a registered trademark of True Textiles, Inc. and designates fabrics that are made from 100% recycled or compostable material using increasingly sustainable manufacturing practices to produce a high quality product that is recyclable at the end of its useful life.

This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.

Cleaning Code:

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Performance:

Breaking Strength (ASTM D5034)
225 lbf min. warp and fill

Tear (ASTM D2261)
35 lbf min. warp and 50 lbf min. fill

Colorfastness to crocking (AATCC 8)
Grade 4 min dry & Grade 3 min. wet

Flammability
ASTM E84 Class 1 or A

Miscellaneous:

Every effort has been made to ensure color accuracy of the digital images, however, please order a sample before specification Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.
Proudly woven in North America supporting our local communities.

www.tmsoundproofing.com
Phone: 845-388-1200 Fax: 845-388-1388